



Digital Leader

AM-Exp Series



Ex-Version available
(...Exp)



AM-Exp-50L, 75L, 100L, 200L, 300L, 500L

- 방진 및 방수등급 : IP65
- Anodized Aluminum 재질
- 방폭등급 : Ex nA IIB T4

Mounting

- Socket-head cap screw
- M8 x 1.25(10.9)
- Tightening torque : 29Nm


Cable

- Braided shield 4-wire round cable with PVC-jacket

Maximum Platform Size

- 600 x 600 mm

Dimensions (Unit : mm)

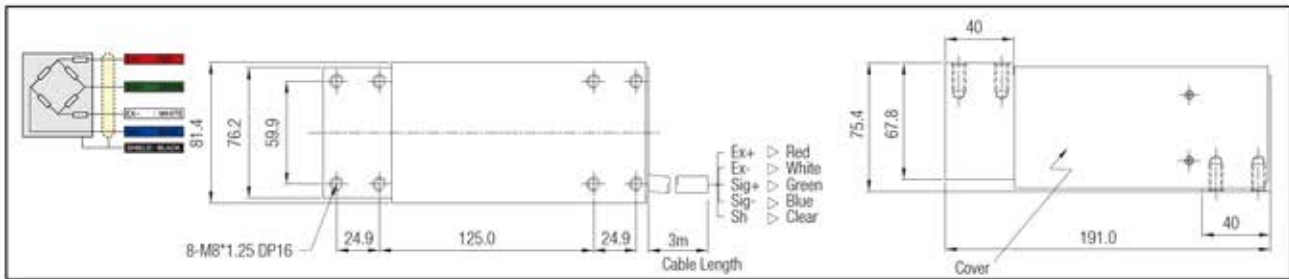

SPECIFICATIONS

MODEL	50L, 75L, 100L, 150L, 200L, 300L, 500L
최대용량	50, 75, 100, 150, 200, 300, 500kgf
정격출력	2.0±0.2 mV/V
제로바란스	0±0.1 mV/V
총합오차	0.03%
재현성	0.01%
크리프(30분)	0.03%
영점온도영향	0.028 %/° C
출력온도영향	0.014 %/° C
권장인가전압	10 V
최대인가전압	15 V
입력단자간저항	400 ± 20 Ω
출력단자간저항	350 ± 3.5 Ω
절연저항	> 2,000 MΩ
온도보상범위	-10 ~ + 40 ° C
사용온도범위	-20 ~ + 70 ° C
허용과부하	150%R.O
케이블길이	3m
소비자가	