

Ex d IIB+H2 T6 IP65
Ex tD A21 T85°C IP65


• Data

모 델	박스규격	Max. T/B (20A)	Dimension(mm)					
			A	B	C	D	ØX	H
IND	220×330×130	20 P	220	330	255	280	10	130
	300×300×310	30 P	300	300	340	240	12	310
	340×500×210	50 P	340	500	380	375	12	210
	400×500×235	60 P	400	500	460	400	15	235
	500×500×230	100 P	500	500	560	395	15	230
	500×700×290	120 P	500	700	600	565	15	290

• Materials Data

Descriptions	Materials
Body	Cast Aluminum Alloy
Cover	Cast Aluminum Alloy
Glass	Heat resistant hard glass

IP65

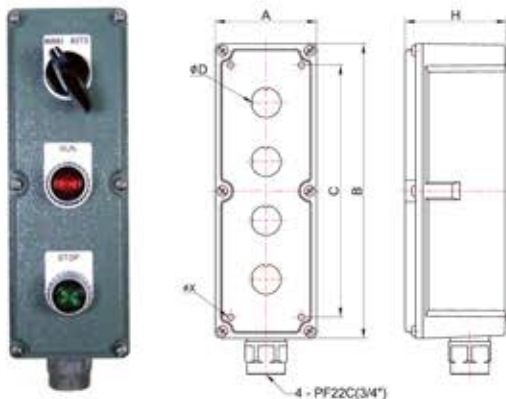

• Data

모 델	Type (Ø25)	Dimension(mm)					
		A	B	C	ØD	ØX	H
DCS-1	1 G	86	150	114	25.3	5.5	86
DCS-2	2 G	86	150	114	25.3	5.5	86
DCS-3	3 G	86	250	214	25.3	5.5	86
DCS-4	4 G	86	250	214	25.3	5.5	86
DCS-5	5 G						

모 델	Type (Ø25)	Dimension(mm)					
		A	B	C	ØD	ØX	H
DCS-11	1 G	86	150	114	30.3	5.5	86
DCS-21	2 G	86	150	114	30.3	5.5	86
DCS-31	3 G	86	250	214	30.3	5.5	86
DCS-41	4 G	86	250	214	30.3	5.5	86
DCS-51	5 G						

• Unit Symbol

- Ⓜ PB ON, OFF Push button switched, AC500V 3A
- Ⓚ Key locked ON, OFF Push button switches AC250V 6A
- Ⓢ Selector switched, AC250V 6A 2&3 notch positions
- Ⓛ Pilot lamps AC110V 220V 18V s/W, Red, Green, White color globe
- Ⓜ Meter boxes Ampermeter & Volt meters 5A 15A 30/5A 300/5A
- Ⓛ Buzzer Signales AC110V 220V, DC12V 24V
- Ⓢ CS Cam Switches AC250V 6A max. position 6 Max notch - 12