

Ex tD A22 T100°C IP65

• Data


최대 전압	모 델	규 격	Dimension(mm)			
			A	B	ØX	H
AC 480V 200P	WCJB-TD-200	700×1000×300	700	1000	12	300
AC 480V 300P	WCJB-TD-300	800×1500×375	800	1500	12	375

• Max. size hubs that can be used

박스규격	Connection Hub Type	Max HUB Q'TY (PF, NPT, M)								
		1/2"(16C)	3/4"(22C)	1"(28C)	1 1/4"(36C)	1 1/2"(42C)	2"(54C)	2 1/2"(70C)	3"(82C)	4"(104C)
		M20	M25	M32	M40	M50	M63	M75	M90	M110
WCJB-TD-200	Top&Bottom	75	42	24	19	11	11	-	-	-
	Left&Right	84	46	21	21	15	15	-	-	-
WCJB-TD-300	Top&Bottom	75	42	24	19	11	11	-	-	-
	Left&Right	84	46	21	21	15	15	-	-	-

• Materials Data

Descriptions	Materials
Body	Stainless Steel
Cover	Stainless Steel

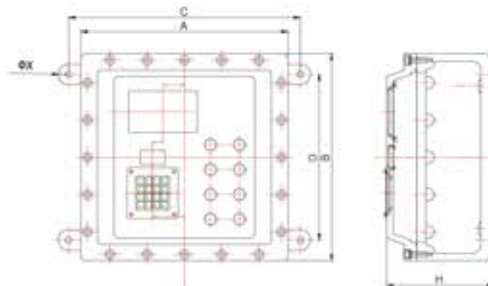

Ex d IIB+H2 T6  
Ex tD A21 T85°C IP65

• Data

최대 전압	모 델	규 격	Dimension(mm)					
			A	B	C	D	ØX	H
AC 600V 100P	FOB-V100	500×500×250	500	500	560	400	25	250
AC 600V 100P	FOB-TD-V100	500×500×250	500	500	560	400	25	250

• Max. size hubs that can be used

박스규격	Connection Hub Type	Max HUB Q'TY (PF, NPT, M)								
		1/2"(16C)	3/4"(22C)	1"(28C)	1 1/4"(36C)	1 1/2"(42C)	2"(54C)	2 1/2"(70C)	3"(82C)	4"(104C)
		M20	M25	M32	M40	M50	M63	M75	M90	M110
FOB-V100 FOB-TD-V100	Left	18	16	13	6	6	5	4	3	-
	Right	18	16	13	6	6	5	4	3	-
	Top	18	16	13	6	6	5	4	3	-
	Bottom	18	16	13	6	6	5	4	3	-

• Materials Data

Descriptions	Materials
Body	Cast Aluminum Alloy
Cover	Cast Aluminum Alloy